

# LHX-1A




## Parameter

Material 材料: Alloy 合金钢, Stainless 不锈钢


## Application

Shearbeam Load Cell 适用于悬臂梁传感器


## Outline Dimensions

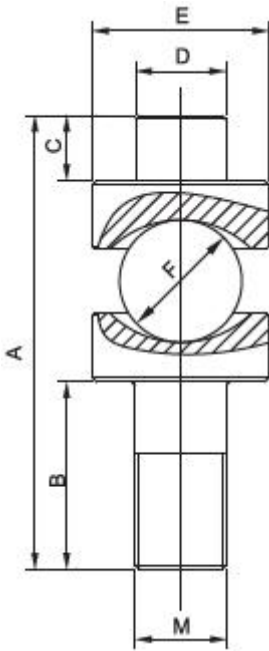

Size	A	B	C	D	E	F	M
LHX005-02	81.2	31.0	12.0	12.0	32.0	22.2	M12*1.75
LHX025-05	91.0	37.0	14.0	20.0	35.0	24.5	M18*1.5
LHX075-10	130.1	52.0	18.0	24.0	49.0	38.1	M24*2
LHX010-5se	81.2	31.0	12.0	12.0	32.0	22.2	1/2-20
LHX005-10	90.0	37.0	14.0	20.0	35.0	24.5	3/4-16
LHX015-20	130.1	52.0	18.0	24.0	49.0	38.1	1-14



Size	A	B	C	SR
LHY010-0075	41.0	14.0	5.0	15.9
LHY100-0250	43.0	19.0	7.6	22.2
LHY500	59.0	32.0	7.8	22.2
LHY600-1000	98.0	55.0	13.0	45.0

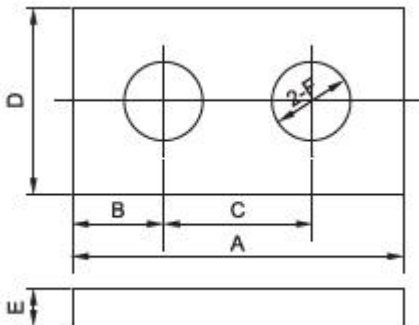

Size	A	B	C	D	E	F
PAD005-02	57.0	15.7	25.4	32.0	3.5	13.5
PAD025-05	76.0	19.1	38.1	38.0	4.5	20.0
PAD075-10	102.0	25.4	50.8	50.8	6.4	27.0



Huzhou Liheng Electronic Technology Co., Ltd

[www.lihengkeji.com](http://www.lihengkeji.com)